Phase 1 12" x 12" SF
Phase 2 12" x 12" SF
Phase 3 12" x 12" SF

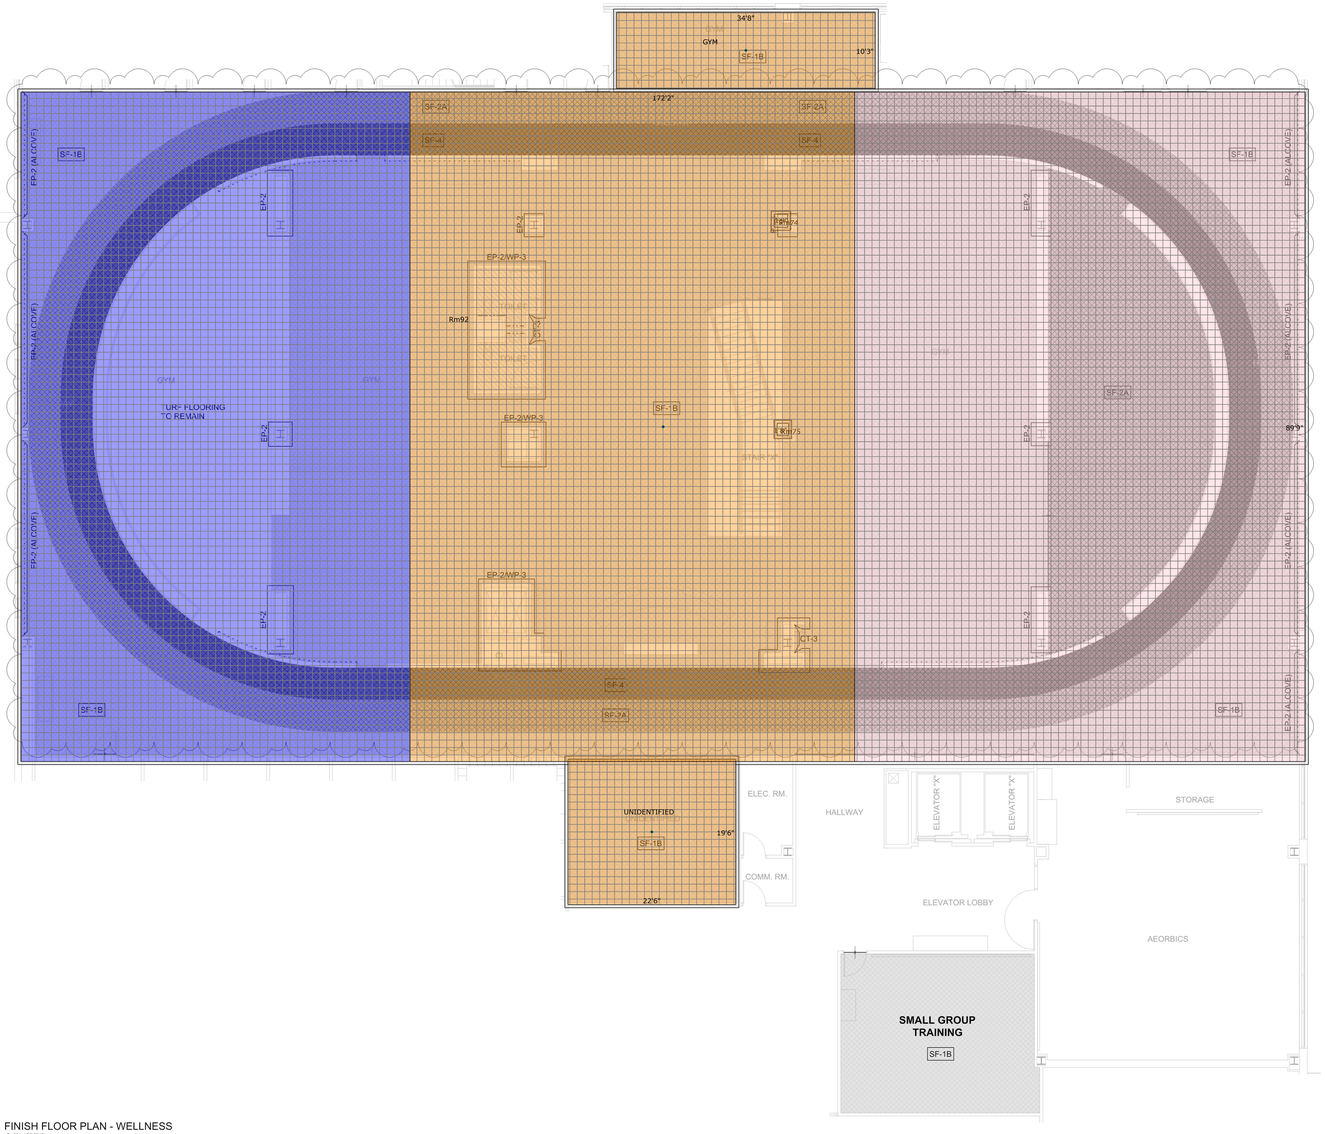

1 FINISH FLOOR PLAN - WELLNESS CENTER
1/8" = 1'-0"



2 RCP - SMALL GROUP TRAINING
1/8" = 1'-0"

FINISH REPLACEMENT NOTES

1. PAINT ALL WALLS EP-1, UNO.
2. RESTROOM FLOORS TO BE RSF-1.
3. REPLACE/ADD WALL PROTECTION, WP-1A,SEE FINISH PLAN.
4. CUSTOM VINYL WALL GRAPHICS BY IMAGE360, SEE FINISH PLAN.
5. GYM FLOORING TO BE REPLACED, SEE FINISH PLAN.
6. SMALL GROUP TRAINING CEILING TO BE ACT-1.
7. SMALL GROUP TRAINING REPLACE 2X2 FIXTURE, LF-1, MATCH EXISTING COUNT AND LOCATIONS.

ADD ALTERNATE NOTES

1. PAINT CEILING PT-X.

LIGHTING LEGEND

LF-1 SEE FINISH LEGEND

LF-2 SEE FINISH LEGEND

INTERIOR DESIGN LEGEND

X-X ACCENT AND/OR SPECIFIC FINISH

(CG) CORNER GUARD - SEE FINISH SCHEDULE

(WP-1A) WALL PROTECTION - SEE FINISH LEGEND

(WP-1B) WALL PROTECTION - SEE FINISH LEGEND

(WP-3) WALL PROTECTION - SEE FINISH LEGEND

CHANGE IN FLOORING WHERE FLOORING TRANSITION REQUIRED BETWEEN DIFFERENT FINISH MATERIALS

CPT-1 | CPT-3 | RSF-6

LVT-1 | CT-1

RSF-1 | RSF-3 | RSF-2

SF-1 | SF-2 | SF-3

INTERIOR DESIGN FINISH SCHEDULE

Room Name	Ceiling Finish	Wall Finish	Base Finish	Floor Finish	Millwork Finish	Door/Door Frame Finish	Note
HALLWAY	SEE ALTERNATE	EP-1	RB-1	SEE FINISH PLAN	-	PT-2	
TOILET	-	EP-1, WP-1	IB-1	RSF-2	-	PT-2	WALL PROTECTION - SEE FINISH PLAN
GYM	SEE ALTERNATE	EP-1, EP-2	RB-1	SEE FINISH PLAN	-	PT-2	
AEROBICS	-	EP-1	RB-1	-	-	PT-2	
SMALL GROUP TRAINING	ACT-1	EP-1	RB-1	SF-1B	-	PT-2	

Date 07/10/2026

CITYWORX
COMMERCIAL INTERIORS

Description	Date
DESIGN DEVELOPMENT	05/08/2026
BIDS	06/05/2026
BULLETIN 1	7/10/2026

Corewell Health

ROCHESTER HEALTH & WELLNESS CENTER

1555 E South Blvd.
Rochester Hills, MI 48307

FINISH FLOOR PLAN - WELLNESS CENTER

I- 210

Scale As indicated

7/10/2026 1:57:16 PM